

DATASHEET

Future Is In Control

FE0361AAS

Three-Phase IPM for
High-voltage
Applications

Copyright Notice

Copyright by Fortior Technology (Shenzhen) Co., Ltd. All Rights Reserved.

Right to make changes — Fortior Technology (Shenzhen) Co., Ltd. reserves the right to make changes in the products – including circuits, standard cells, and/or software – described or contained herein in order to improve design and/or performance. The information contained in this manual is provided for the general use by our customers. Our customers shall ensure that they take appropriate action so that their use of our products does not infringe upon any patents. It is the policy of Fortior Technology (Shenzhen) Co., Ltd. to respect the valid patent rights of third parties and not to infringe upon or assist others to infringe upon such rights.

This manual is copyrighted by Fortior Technology (Shenzhen) Co., Ltd. You may not reproduce, transmit, transcribe, store in a retrieval system, or translate into any language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, any part of this publication without the expressly written permission from Fortior Technology (Shenzhen) Co., Ltd. You may not alter or remove any copyright or other notice from copies of this content.

If there are any differences between the Chinese and the English contents, please take the Chinese version as the standard.

Disclaimer

This document is the property of Fortior Technology (Shenzhen) Co., Ltd. and its subsidiaries (hereinafter referred to as "Fortior Technology"). This document is provided on an "AS IS" basis, without warranty of any kind, express or implied, including but not limited to the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights of any third-party. Any and all information stated herein is for reference purpose only, and Fortior Technology hereby disclaims any and all warranties and liabilities of any kind.

The customer has the full responsibility to design, program and test their applications, evaluate functionality and safety of their final products and accept all loss or damage, legal claim or lawsuit whatsoever arising from the use of the information, data or opinions contained herein, and agrees to defend, hold harmless and indemnify Fortior Technology from and against any and all claims, damages and liabilities. No license, express or implied, to any intellectual property rights of Fortior Technology is granted by this document. Fortior Technology reserves the rights to amend, revise or make changes to this document at any time without prior notice.

In the event of any inconsistency, conflict or ambiguity under this disclaimer, the final interpretation is at the sole discretion of Fortior Technology.

Contents

Copyright Notice	1
Disclaimer	2
Contents	3
1 System Introduction	4
1.1 Overview	4
1.2 Applications	4
1.3 Features	4
1.4 Key Parameters	4
1.5 Typical Application Diagram	5
1.6 Functional Block Diagram	6
1.7 Pin Definitions	7
1.7.1 FE0361AAS SSOP A54-38 Pinout Diagram	7
1.7.2 FE0361AAS SSOP A54-38 Pins	8
2 Package Information	10
3 Ordering Information	11
4 Electrical Characteristics	12
4.1 Absolute Maximum Ratings	12
4.2 Recommended Operating Conditions	13
4.3 Global Electrical Characteristics	13
4.4 Package Thermal Resistance	14
5 Description	15
5.1 Under-voltage Lockout (UVLO)	15
6 Revision History	16


1 System Introduction

1.1 Overview

FE0361AAS is a three-phase intelligent power module (IPM) especially designed for high-voltage applications. It integrates three high-voltage half-bridge gate driver chips and six power fast-recovery MOS. Due to a high level of integration, few peripheral components are required during application. FE0361AAS contains VCC/VBS under-voltage lockout (UVLO) circuitry, protecting the power tube from operating with insufficient voltage. Also, the power module provides separate negative DC terminals for each phase to measure the current independently. FE0361AAS supports cross-conduction prevention and dead time insertion to effectively protect the power IC. With strong insulation, high thermal conductivity and low electromagnetic interference, the power module is housed in a compact package and suitable for built-in motors and other space constraint applications.

1.2 Applications

High pressure fans, indoor air-conditioner units, outdoor air-conditioner units



FE0361AAS

1.3 Features


- > 600V 3A fast-recovery power MOS
- > VCC range: 13V ~ 20V
- > Integrated control, drive and high-voltage power MOS
- > Support high-level signals, and compatible with 3.3V/5V MCU
- > Low electromagnetic interference design
- > Support UVLO feature
- > Built-in deadtime module
- > Withstand isolation voltage: 2000V
- > RoHS compliant

1.4 Key Parameters

- > MOSFET Output Voltage: 600V
- > Single MOS Drive Current (DC): $\pm 3A$ (Max.)
- > Single MOS Drive Current (Pulse): $\pm 12A$ (Max.)
- > MOSFET DC Output Resistance: 2.6Ω (Typ.)
- > Max. Junction Temperature: $+150^{\circ}\text{C}$
- > Power Dissipation: 3.00W


1.5 Typical Application Diagram

Figure 1-1 Typical Application Diagram

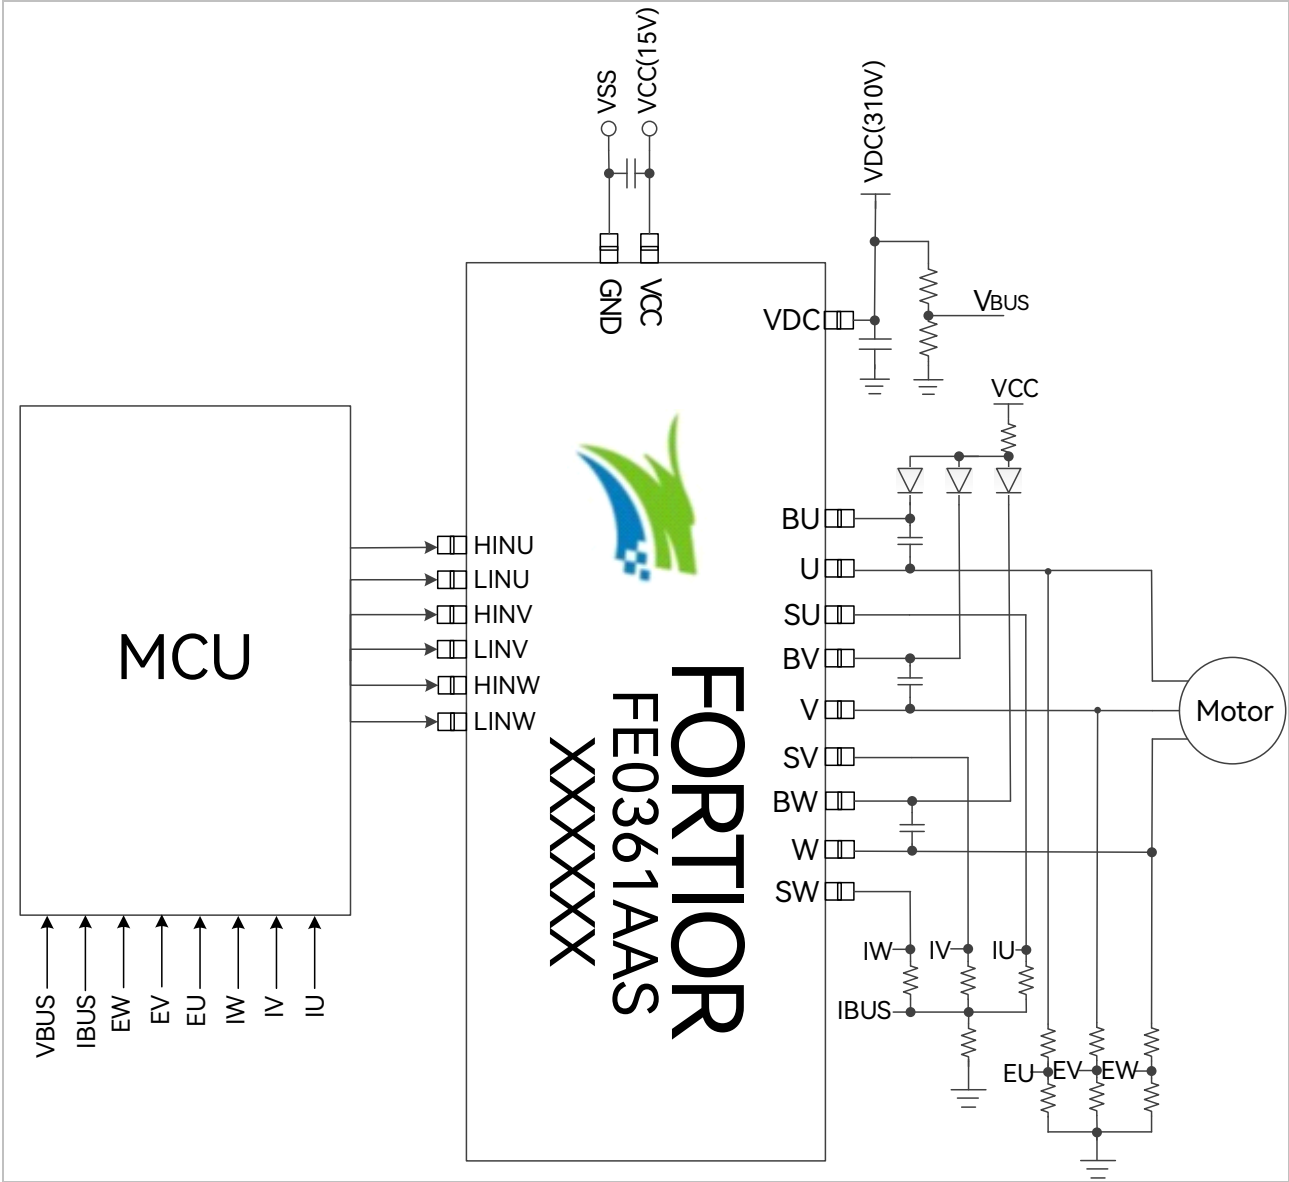

1.6 Functional Block Diagram

Figure 1-2 Functional Block Diagram of FE0361AAS

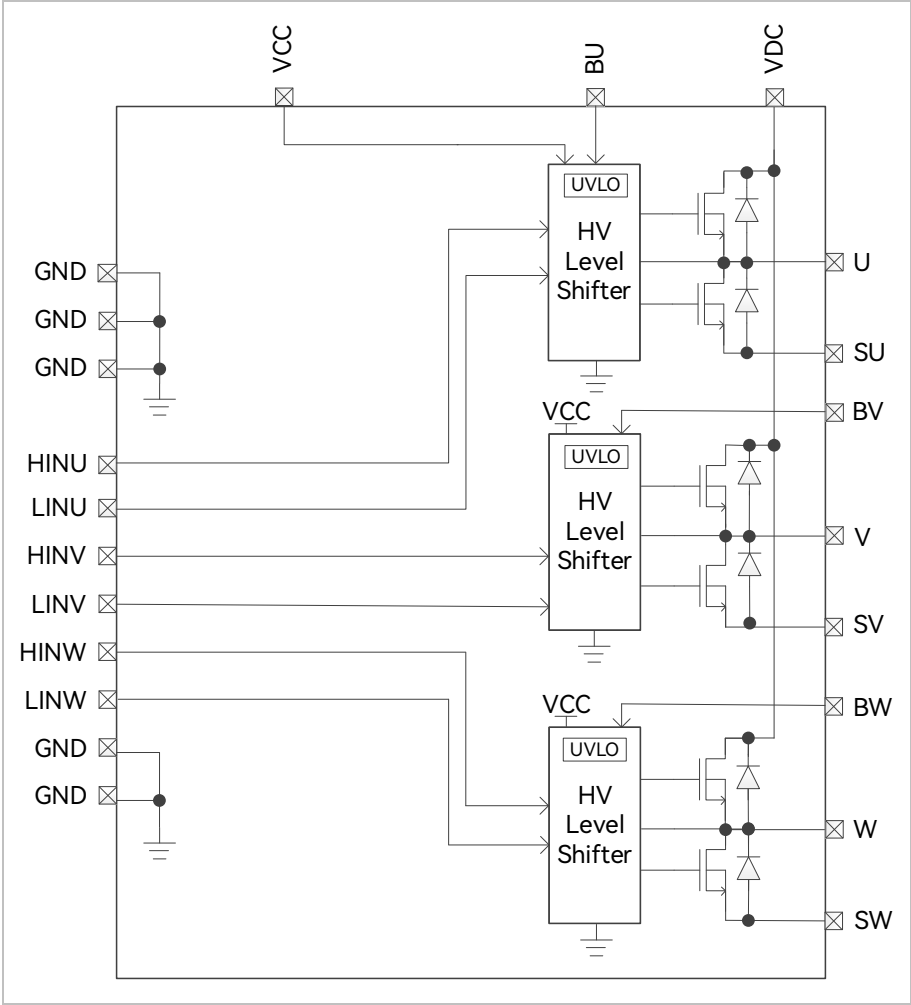

1.7 Pin Definitions

The IO types are defined as follows:

- > DI = Digital Input
- > DO = Digital Output
- > DB = Digital Bidirectional
- > AI = Analog Input
- > AO = Analog Output
- > P = Power Supply

1.7.1 FE0361AAS SSOP A54-38 Pinout Diagram

Figure 1-3 FE0361AAS SSOP A54-38 Pinout Diagram



1.7.2 FE0361AAS SSOP A54-38 Pins


Table 1-1 FE0361AAS SSOP A54-38 Pin Descriptions

Pin	FE0361AAS SSOP A54-38	IO Type	Description
VCC	1	P	Power input
GND	2	P	Ground
GND	3	P	Ground
GND	4	P	Ground
NC	5	-	Not connected
LINW	6	DI	Low-side signal input for phase W
NC	7	-	Not connected
HINW	8	DI	High-side signal input for phase W
NC	9	-	Not connected
NC	10	-	Not connected
NC	11	-	Not connected
NC	12	-	Not connected
LINV	13	DI	Low-side signal input for phase V
NC	14	-	Not connected
HINV	15	DI	High-side signal input for phase V
NC	16	-	Not connected
NC	17	-	Not connected
NC	18	-	Not connected
NC	19	-	Not connected
NC	20	-	Not connected
LINU	21	DI	Low-side signal input for phase U
NC	22	-	Not connected
HINU	23	DI	High-side signal input for phase U
NC	24	-	Not connected
GND	25	P	Ground
GND	26	P	Ground
VCC	27	P	Power input
VDC	28	P	High-voltage power supply
VDC	29	P	High-voltage power supply
BU	30	P	U-phase floating power supply. The voltage floats with respect to phase U.
U	31	DO	U-phase output

Pin	FE0361AAS SSOP A54-38	IO Type	Description
SU	32	P	U-phase ground
BV	33	P	V-phase floating power supply. The voltage floats with respect to phase V.
V	34	DO	V-phase output
SV	35	P	V-phase ground
BW	36	P	W-phase floating power supply. The voltage floats with respect to phase W.
W	37	DO	W-phase output
SW	38	P	W-phase ground

2 Package Information

Figure 2-1 FE0361AAS SSOP A54-38 Package Drawings and Dimensions

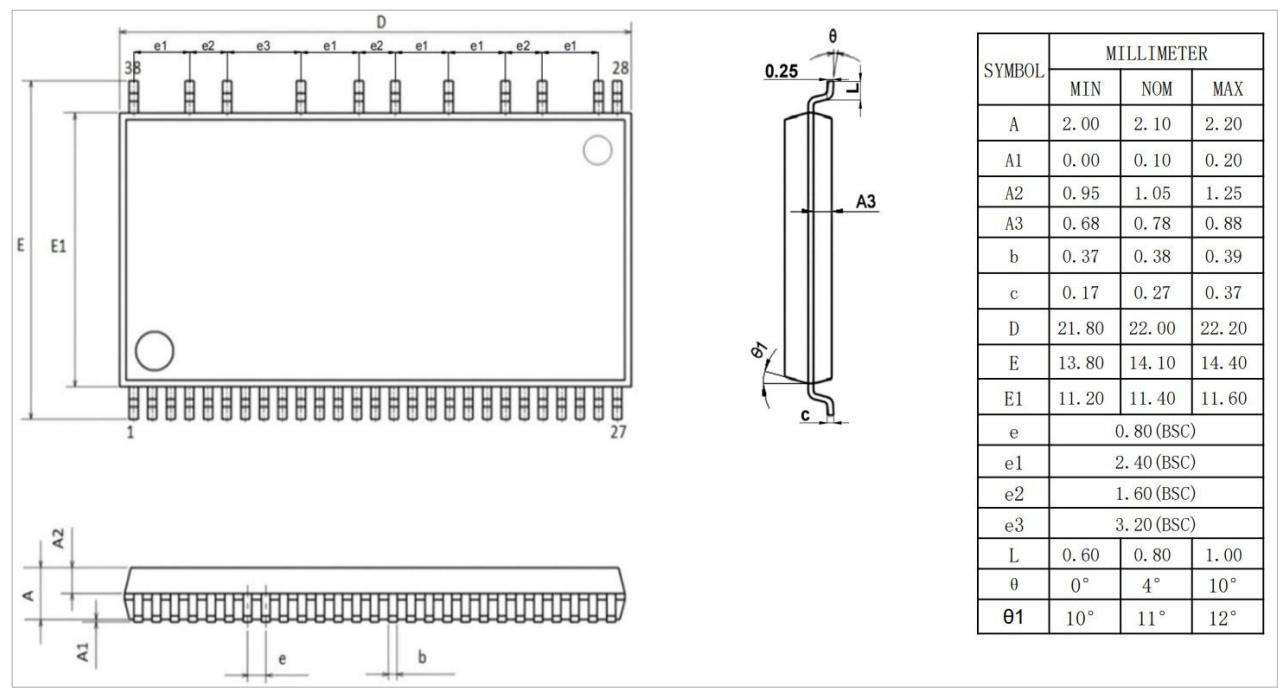

3 Ordering Information

Table 3-1 Model Selections

Model	Power Supply (V)	Rdson (High Side+ Low Side) (Ω)	Single MOS Continuous Drain Current (A)	Control Function	Protection Features		Operating Junction Temperature Tj (°C)	Lead-free	Package	Package Method	Quantity
				Driver Type	Under-voltage Protection Features	Cross-conduction Prevention					
FE0361AAS	13 ~ 20	5.2	3	N + N	✓	✓	-40 ~ 150	✓	SSOP A54-38	Tape & Reel	1000

4 Electrical Characteristics

4.1 Absolute Maximum Ratings

Table 4-1 Absolute Maximum Ratings

(T_A = 25°C unless otherwise specified)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Power Drive Circuit					
MOSFET Drain-to-Source Voltage V _{DSS}		600	–	–	V
Continuous Drain Current I _{DMAX(DC)} of Single MOS	T _C = 25°C	–	–	3 ^[2]	A
Pulsed Drain Current I _{DMAX(PLS)} of Single MOS	T _C = 25°C	–	–	12 ^{[2][3]}	A
Continuous Diode Forward Current I _F	T _C = 25°C	–	–	5 ^[2]	A
Short Circuit Withstand Time T _{SC}	V _{GS} = 15V, V _{CC} ≤ 400V, T _J ≤ 175°C	–	–	5	μs
Controller					
High-side Floating Absolute Voltage V _{BU} , V _{BV} , V _{BW}		–0.3	–	625 ^[2]	V
High-side Floating Offset Voltage V _S		V _B – 25	–	V _B + 0.3	V
High-side Output Voltage V _{HO}		V _S – 25	–	V _B + 0.3	V
Low-side Supply Voltage V _{CC}		–0.3	–	25	V
Low-side Output Voltage V _{LO}		–0.5	–	V _{CC} + 0.3	V
Logic Input Voltage (HIN, LIN) V _{IN}		–0.5	–	V _{CC} + 0.3	V
Offset Voltage Transient dV _S /dt		–	≤ 50	–	V/ns
Overall System					
Storage Temperature T _{STG}		–40	–	125	°C
Case Temperature T _C	–40°C ≤ T _J ≤ 150°C	–30	–	125	°C
Withstand Isolation Voltage V _{ISO}	60Hz, Sine Wave, 60s, The pin is connected to the substrate	–	–	2000	Vrms
Junction Temperature T _J ^[4]		–40	–	150	°C
Power Dissipation P _d		–	–	3 ^[5]	W

**Caution:**

- [1] Stress values greater than Table 4-1 Absolute Maximum Ratings listed above may cause irremediable damages to the device. These are stress ratings only, and it is NOT recommended to use your device in conditions that go beyond these stress ratings. Exposure to Absolute Maximum Ratings for extended periods may affect device reliability.
- [2] Power dissipation shall not exceed P_d or ASO.
- [3] $P_w \leq 10\mu s$ and duty cycle $\leq 1\%$.
- [4] The maximum junction temperature T_J for the IPM is $150^\circ C$ (@case temperature $T_C \leq 100^\circ C$). However, it shall be limited to $T_J(av) \leq 125^\circ C$ (@case temperature $T_C \leq 100^\circ C$) to ensure the IPM operates safely and reliably.
- [5] The power dissipation is $24mW/^\circ C$ at operating temperature of $25^\circ C$ or above when the chip is mounted on a $70mm \times 70mm \times 1.6mm$ FR4 glass-epoxy circuit board with less than 3% copper foil.

4.2 Recommended Operating Conditions

Table 4-2 Recommended Operating Conditions

(T_A = 25°C unless otherwise specified)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Supply Voltage V _{DC}		–	310	400	V
Supply Voltage V _{CC}	Between V _{CC} and GND	13.5	15	16.5	V
High-side Bias Voltage V _{BS}	Between V _B and V _S	13.5	15	16.5	V
PWM Switching Frequency F _{PWM}	T _J ≤ 150°C	–	–	20	kHz
Logic Input Voltage (HIN, LIN)V _{IN}		0	–	V _{CC}	V
Ambient Temperature T _A		–40	–	85	°C

**Note**

All voltages are specified with respect to the corresponding GND pin.

4.3 Global Electrical Characteristics

Table 4-3 Global Electrical Characteristics

(T_A = 25°C and V_{CC} = 15V unless otherwise specified)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Driver					
MOSFET Output					
Drain-to-Source Breakdown Voltage V _{(BR)DSS}		600	–	–	V

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Drain-to-Source Leakage Current I_{DSS}	Single MOS	-	-	100	μA
Static Drain-to-Source On Resistance $R_{DS(ON)}$	$I_D = 1.5A$	-	2.6	3.2	Ω
Source-to-Drain Diode Forward Voltage V_{SD}	$I_D = 1.5A$	-	-	1.2	V
Power Supply					
V_{CC} Quiescent Current I_{QCC}	$V_{IN} = 0V / 5V$	240	480	720	μA
V_B Quiescent Current I_{BBS}		30	75	120	μA
V _{CC} Under-voltage Lockout (UVLO)					
V _{CC} Release Voltage V_{CCUVH}		11.5	12.1	12.7	V
V _{CC} Lockout Voltage V_{CCUVL}		10.5	11.1	11.7	V
V _B Under-voltage Lockout (UVLO)					
V _B UVLO Release Voltage V_{BUVH}	$V_{BX} - V_X$	9.5	10.1	10.7	V
V _B UVLO Lockout Voltage V_{BUVL}	$V_{BX} - V_X$	8.5	9.1	9.7	V
Input Signal					
High-level Input Voltage V_{IH}		2.8	-	-	V
Low-level Input Voltage V_{IL}		-	-	0.8	V
High-level Input Bias Current I_{IN+}	$V_{IN} = 5V$	12	24	36	μA
High-level Input Bias Current I_{IN-}	$V_{IN} = 0V$	-	-	1	μA
Deadtime DT		260	480	700	ns

4.4 Package Thermal Resistance

Table 4-4 SSOP A54-38 Package Thermal Resistance

Parameter	Test Conditions	Max.	Unit
Junction-to-ambient Thermal Resistance θ_{JA} ^[1]	JEDEC standard, 2S2P PCB	42.5	$^{\circ}C/W$
Junction-to-package-top Thermal Resistance ψ_{JT}	JEDEC standard, 2S2P PCB	12.5	$^{\circ}C/W$



Note

[1] The actual measurements may vary depending on the conditions.

5 Description

5.1 Under-voltage Lockout (UVLO)

Figure 5-1 Under-voltage Lockout (Low-side)


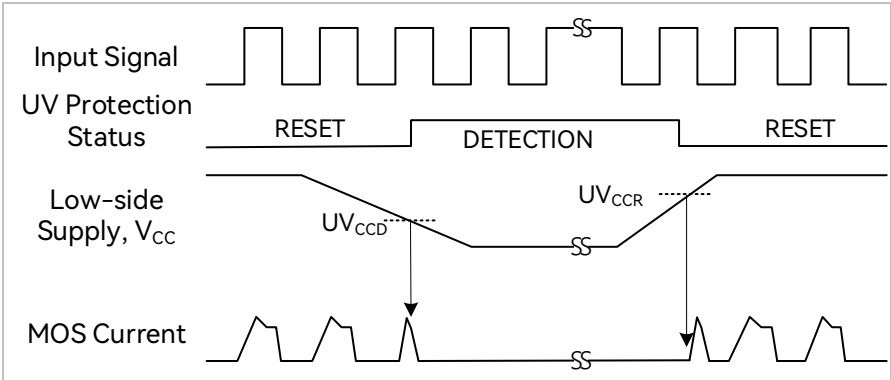


Figure 5-2 Under-voltage Lockout (High-side)



6 Revision History

Rev.	Description	Date	Prepared By
V1.1	First release, translated from Chinese version V1.1	2025/01/20	Freya Fu
V1.2	Modified “3.5V/5V MCU” as “3.3V/5V MCU” in sector 1.3 Features	2025/05/14	Freya Fu
V1.3	Reviewed the Test Conditions and Parameters of VCC Quiescent Current IQCC and VBB Quiescent Current IBBS	2025/06/05	Freya Fu

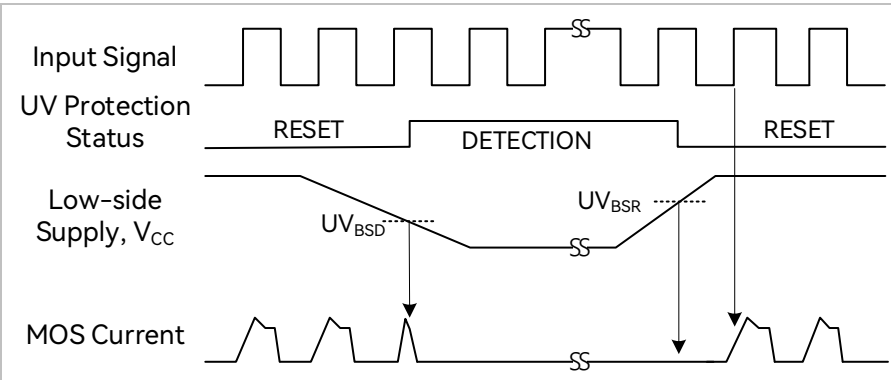

FORTIOR TECHNOLOGY (SHENZHEN) CO., LTD.


Room 203, 2/F, Building No.11, Keji Central Road 2, Software Park,
High-Tech Industrial Park, Shenzhen, P.R. China

Tel.: 0755-26867710

Fax: 0755-26867715

P.C.: 518057

Web: <http://www.fortiortech.com>

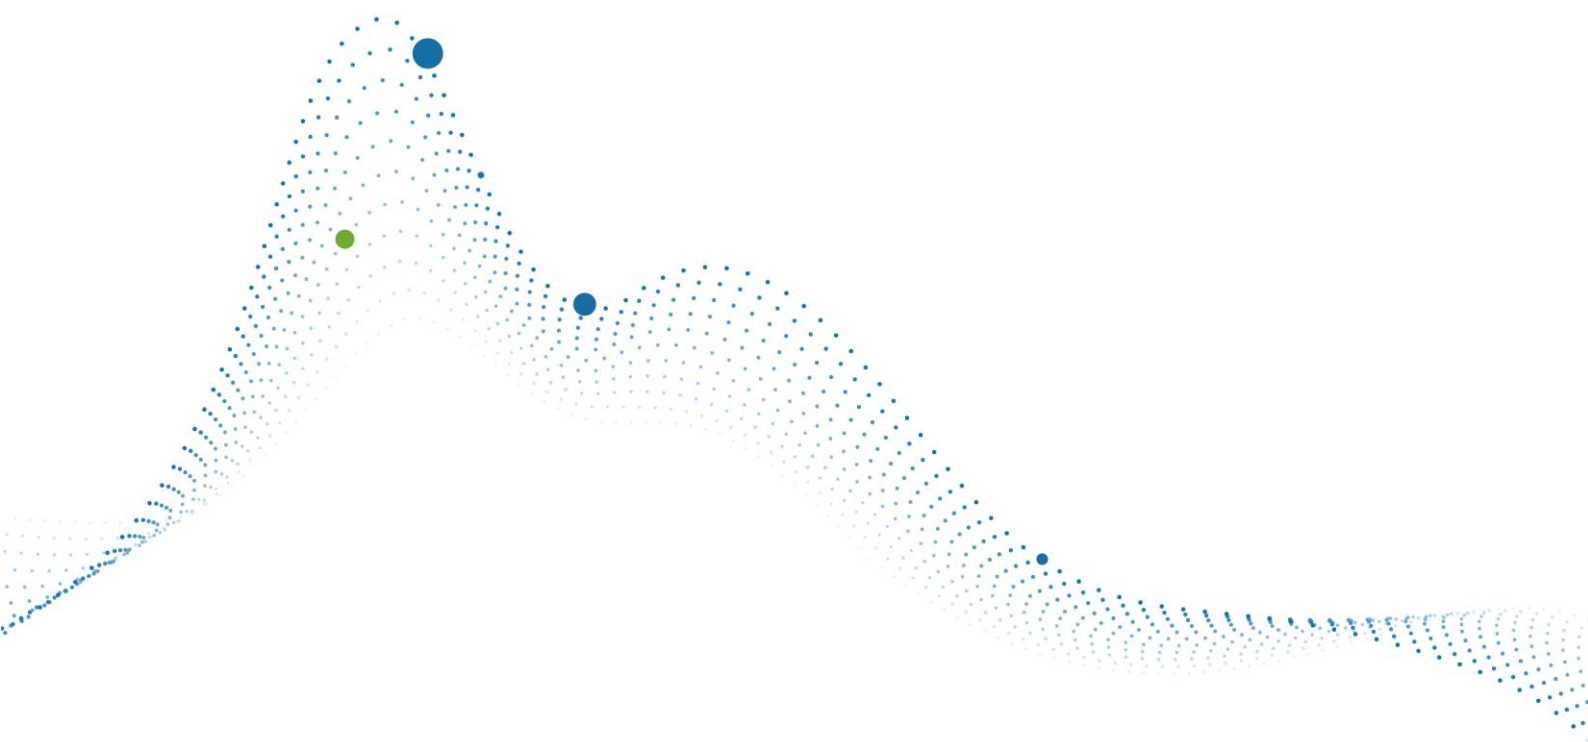

The content of this document

Copyright by Fortior Technology (Shenzhen) Co., Ltd. All Rights Reserved.