

# INN650N140A

## 1. General description


650V GaN-on-Silicon Enhancement-mode Power Transistor Bare Die

## 2. Features

- Enhancement mode transistor-Normally off power switch
- Ultra high switching frequency
- No reverse-recovery charge
- Low gate charge, low output charge
- Qualified for industrial applications according to JEDEC Standards
- ESD safeguard
- RoHS, Pb-free, REACH-compliant

## 3. Applications

- AC-DC converters
- DC-DC converters
- Totem pole PFC
- Fast battery charging
- High density power conversion
- High efficiency power conversion



## 4. Key performance parameters

**Table 1** Key performance parameters at  $T_j = 25\text{ }^\circ\text{C}$

Parameter	Value	Unit
$V_{DS,max}$	650	V
$R_{DS(on),max}$ @ $V_{GS} = 6\text{ V}$	140	m $\Omega$
$Q_{G,typ}$ @ $V_{DS} = 400\text{ V}$	3.5	nC
$I_{D,pulse}$	32	A
$Q_{OSS}$ @ $V_{DS} = 400\text{ V}$	33	nC
$Q_{rr}$ @ $V_{DS} = 400\text{ V}$	0	nC

## 5. Pin information

**Table 2** Pin information

Gate	Drain	Source
G	D	S1~S6

**Table 3** Ordering information

Type/Ordering Code	Product Code
INN650N140A	INN650N140A

**Table of contents**

<b>1. General description .....</b>	<b>1</b>
<b>2. Features .....</b>	<b>1</b>
<b>3. Applications.....</b>	<b>1</b>
<b>4. Key performance parameters.....</b>	<b>1</b>
<b>5. Pin information .....</b>	<b>1</b>
<b>6. Maximum ratings.....</b>	<b>3</b>
<b>7. Electric characteristics .....</b>	<b>4</b>
<b>8. Electric characteristics diagrams .....</b>	<b>6</b>
<b>9. Chip drawing .....</b>	<b>12</b>
<b>10. Revision history .....</b>	<b>13</b>

## 6. Maximum ratings

at  $T_j = 25\text{ °C}$  unless otherwise specified.

Exceeding the maximum ratings may destroy the device. For further information, contact Innoscience sales office.

**Table 4** Maximum ratings

Parameter	Symbol	Values	Unit	Note/Test Condition
Drain source voltage	$V_{DS, max}$	650	V	$V_{GS} = 0\text{ V}$ , $T_j = -55\text{ °C to }150\text{ °C}$
Drain source voltage transient <sup>1</sup>	$V_{DS, transient}$	800	V	$V_{GS} = 0\text{ V}$
Drain source voltage, pulsed <sup>2</sup>	$V_{DS, pulse}$	750	V	$T_j = 25\text{ °C}$ ; total time < 10 h
				$T_j = 125\text{ °C}$ ; total time < 1 h
Continuous current, drain source <sup>3</sup>	$I_D$	17	A	$T_c = 25\text{ °C}$
Pulsed current, drain source <sup>4</sup>	$I_{D, pulse}$	32	A	$T_c = 25\text{ °C}$ ; $V_{GS} = 6\text{ V}$ ; $t_{PULSE} = 300\text{ }\mu\text{s}$
Pulsed current, drain source <sup>4</sup>	$I_{D, pulse}$	18	A	$T_c = 125\text{ °C}$ ; $V_{GS} = 6\text{ V}$ ; $t_{PULSE} = 300\text{ }\mu\text{s}$
Gate source voltage, continuous <sup>5</sup>	$V_{GS}$	-1.4 to +7	V	$T_j = -55\text{ °C to }150\text{ °C}$
Gate source voltage, pulsed	$V_{GS, pulse}$	-20 to +10	V	$T_j = -55\text{ °C to }150\text{ °C}$ ; $t_{PULSE} = 50\text{ ns}$ , $f = 100\text{ kHz}$ ; open drain
Power dissipation	$P_{tot}$	113	W	$T_c = 25\text{ °C}$
Operating temperature	$T_j$	-55 to +155	°C	
Storage temperature	$T_{stg}$	-55 to +155	°C	

1.  $V_{DS, transient}$  is intended for non-repetitive events,  $t_{PULSE} < 200\text{ }\mu\text{s}$ .

2.  $V_{DS, pulse}$  is intended for repetitive pulse,  $t_{PULSE} < 100\text{ ns}$ .

3. Limited by maximum temperature allowed with the parts assembled in DFN 5X6 package.

4. Limit was extracted from characterization test, not measured during production.

5. The minimum  $V_{GS}$  is clamped by ESD protection circuit, as shown in Figure 10.

## 7. Electric characteristics<sup>1</sup>

at  $T_j = 25\text{ °C}$ , unless specified otherwise

**Table 5** Static characteristics

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Gate threshold voltage	$V_{GS(th)}$	1.2	1.7	2.5	V	$I_D = 17.2\text{ mA}$ ; $V_{DS} = V_{GS}$ ; $T_j = 25\text{ °C}$
		-	1.7	-		$I_D = 17.2\text{ mA}$ ; $V_{DS} = V_{GS}$ ; $T_j = 150\text{ °C}$
Drain-source leakage current	$I_{DSS}$	-	0.6	25	$\mu\text{A}$	$V_{DS} = 650\text{ V}$ ; $V_{GS} = 0\text{ V}$ ; $T_j = 25\text{ °C}$
		-	7	-		$V_{DS} = 650\text{ V}$ ; $V_{GS} = 0\text{ V}$ ; $T_j = 150\text{ °C}$
Gate-source leakage current	$I_{GSS}$	-	70	-	$\mu\text{A}$	$V_{GS} = 6\text{ V}$ ; $V_{DS} = 0\text{ V}$
Drain-source on-state resistance	$R_{DS(on)}$	-	106	140	m $\Omega$	$V_{GS} = 6\text{ V}$ ; $I_D = 5\text{ A}$ ; $T_j = 25\text{ °C}$
		-	230	-		$V_{GS} = 6\text{ V}$ ; $I_D = 5\text{ A}$ ; $T_j = 150\text{ °C}$
Gate resistance	$R_G$	-	3.5	-	$\Omega$	$f = 5\text{ MHz}$ ; open drain

**Table 6** Dynamic characteristics

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Input capacitance	$C_{iss}$	-	125	-	pF	$V_{GS} = 0\text{ V}$ ; $V_{DS} = 400\text{ V}$ ; $f = 100\text{ kHz}$
Output capacitance	$C_{oss}$	-	41	-	pF	$V_{GS} = 0\text{ V}$ ; $V_{DS} = 400\text{ V}$ ; $f = 100\text{ kHz}$
Reverse transfer Capacitance	$C_{rss}$	-	0.4	-	pF	$V_{GS} = 0\text{ V}$ ; $V_{DS} = 400\text{ V}$ ; $f = 100\text{ kHz}$
Effective output capacitance, energy related <sup>1</sup>	$C_{o(er)}$	-	59	-	pF	$V_{GS} = 0\text{ V}$ ; $V_{DS} = 0\text{ to }400\text{ V}$
Effective output capacitance, time related <sup>2</sup>	$C_{o(tr)}$	-	82	-	pF	$V_{GS} = 0\text{ V}$ ; $V_{DS} = 0\text{ to }400\text{ V}$
Output charge	$Q_{OSS}$	-	33	-	nC	$V_{GS} = 0\text{ V}$ ; $V_{DS} = 0\text{ to }400\text{ V}$
Turn-on delay time	$t_{d(on)}$	-	3	-	nS	$V_{DS} = 400\text{ V}$ ; $I_D = 10\text{ A}$ ; $L = 318\text{ }\mu\text{H}$ ; $V_{GS} = 6\text{ V}$ ; $R_{on} = 10\text{ }\Omega$ ; $R_{off} = 2\text{ }\Omega$ ; See Figure 22
Turn-off delay time	$t_{d(off)}$	-	4	-	nS	
Rise time	$t_r$	-	5	-	nS	
Fall time	$t_f$	-	4	-	nS	

1. The electrical characteristics parameters were tested with the parts assembled in DFN 5X6 package.

2.  $C_{o(er)}$  is the fixed capacitance that gives the same stored energy as  $C_{OSS}$  while  $V_{DS}$  is rising from 0 to 400 V.

3.  $C_{o(tr)}$  is the fixed capacitance that gives the same charging time as  $C_{OSS}$  while  $V_{DS}$  is rising from 0 to 400 V.

**Table 7 Gate charge characteristics**



Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Gate charge	$Q_G$	-	3.5	-	nC	$V_{GS} = 0$ to 6 V; $V_{DS} = 400$ V; $I_D = 5$ A
Gate-source charge	$Q_{GS}$	-	0.3	-	nC	
Gate-drain charge	$Q_{GD}$	-	1.2	-	nC	
Gate Plateau Voltage	$V_{Plat}$	-	2.1	-	V	$V_{DS} = 400$ V; $I_D = 5$ A

**Table 8 Reverse conduction characteristics**

Parameter	Symbol	Values			Unit	Note/Test Condition
		Min.	Typ.	Max.		
Source-Drain reverse voltage	$V_{SD}$	-	2.4	-	V	$V_{GS} = 0$ V; $I_S = 5$ A
Pulsed current, reverse	$I_{S, pulse}$	-	-	32	A	$V_{GS} = 6$ V; $t_{PULSE} = 300$ $\mu$ s
Reverse recovery charge	$Q_{rr}$	-	0	-	nC	$I_S = 5$ A; $V_{DS} = 400$ V
Reverse recovery time	$t_{rr}$	-	0	-	ns	
Peak reverse recovery current	$I_{rrm}$	-	0	-	A	


## 8. Electric characteristics diagrams<sup>1</sup>

at  $T_j = 25\text{ }^\circ\text{C}$ , unless specified otherwise

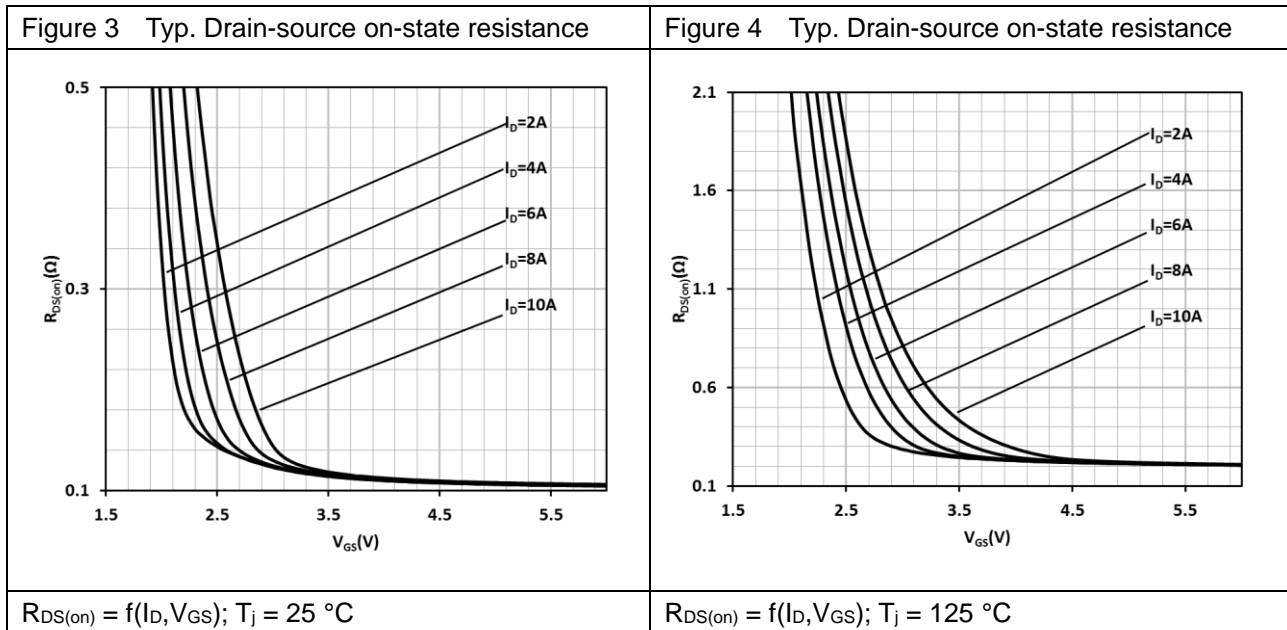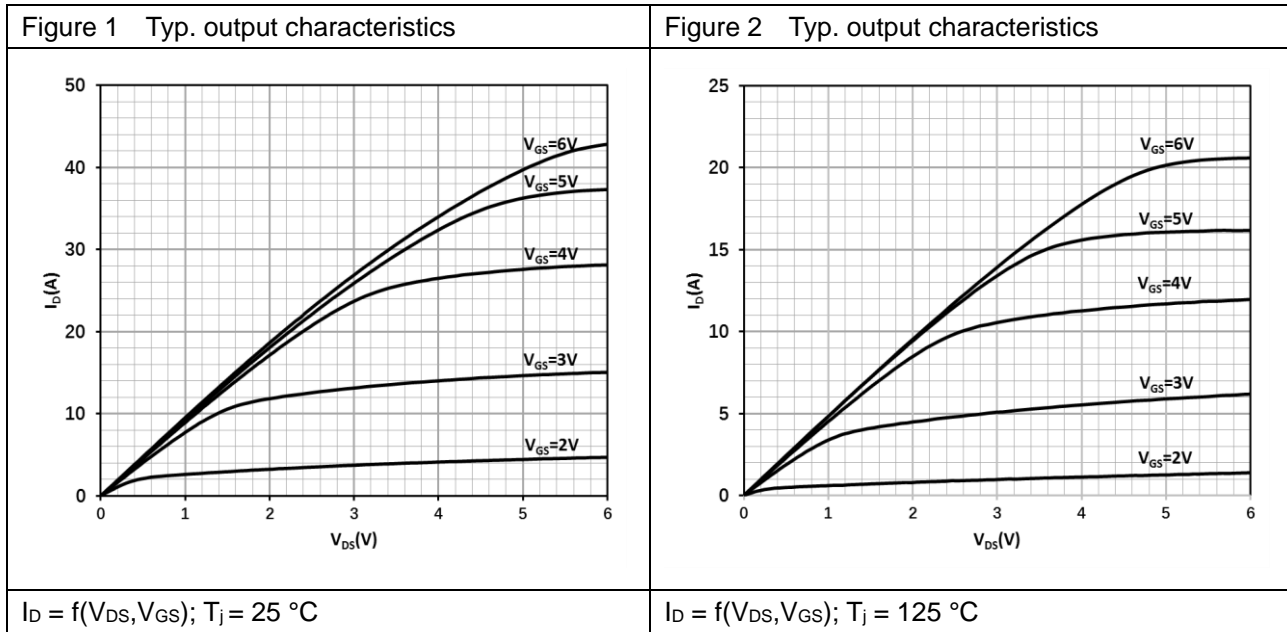


1. The typical electrical characteristic curves were measured with the parts assembled in DFN 5X6 package.

Figure 5 Typ. channel reverse characteristics

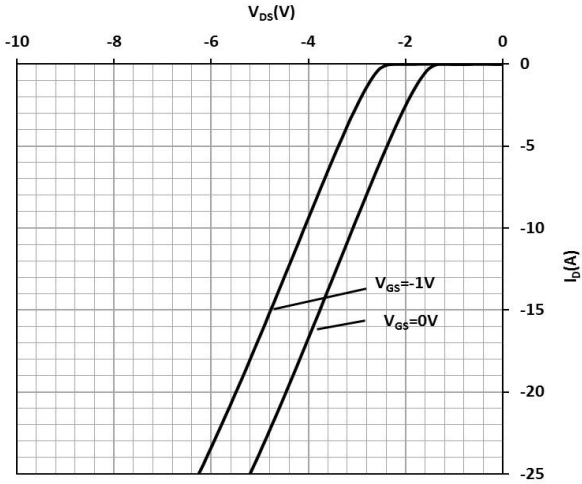


$I_D = f(V_{DS}, V_{GS}); T_j = 25\text{ °C}$

Figure 6 Typ. channel reverse characteristics

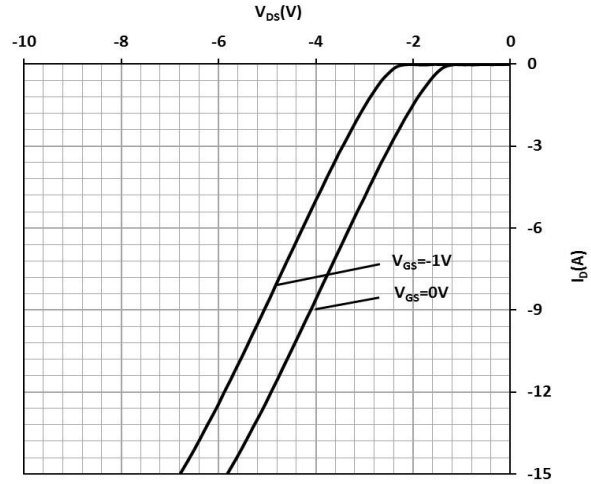


$I_D = f(V_{DS}, V_{GS}); T_j = 125\text{ °C}$

Figure 7 Typ. channel reverse characteristics

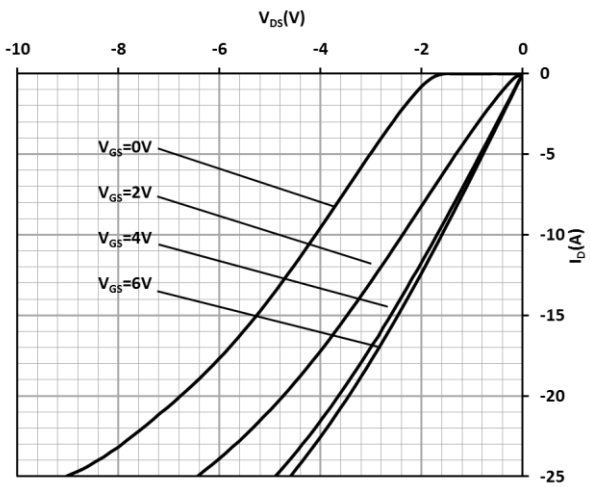


$I_D = f(V_{DS}, V_{GS}); T_j = 25\text{ °C}$

Figure 8 Typ. channel reverse characteristics

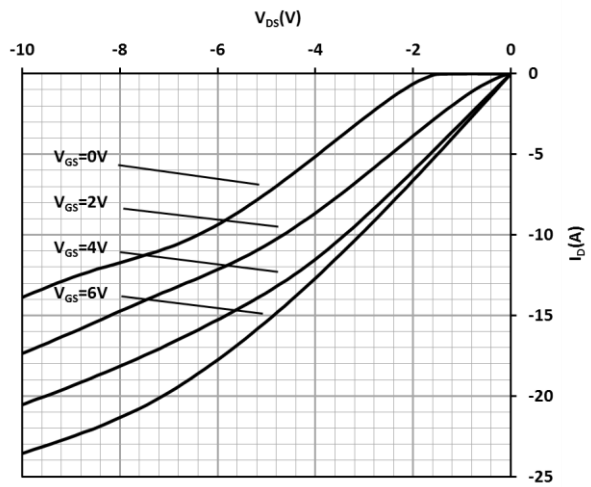


$I_D = f(V_{DS}, V_{GS}); T_j = 125\text{ °C}$

Figure 9 Typ. transfer characteristics

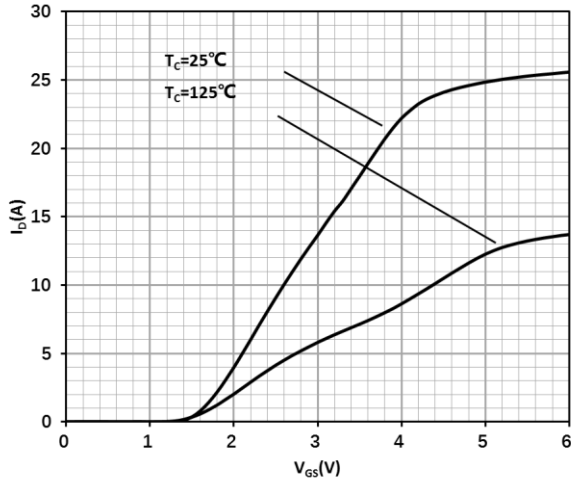


$I_D = f(V_{GS}); V_{DS} = 3\text{ V}$

Figure 10 Typ. Gate-to-Source leakage

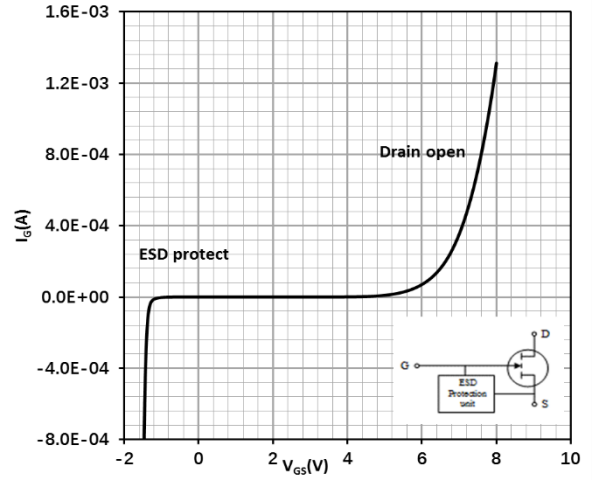

$I_G = f(V_{GS}); I_G$  reverse turn on by ESD unit


Figure 11 Drain-source leakage characteristics

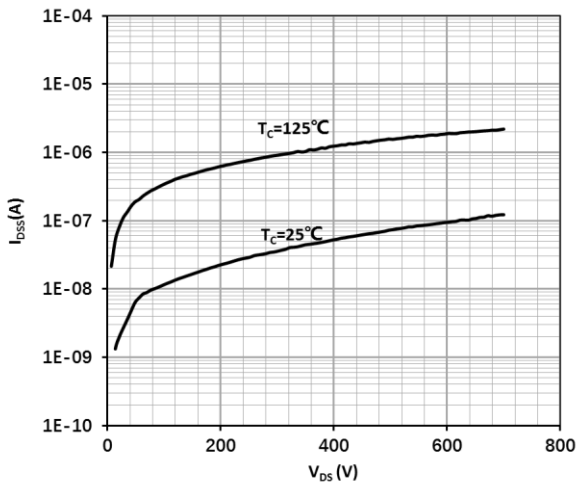

$I_{DSS} = f(V_{DS}); V_{GS} = 0\text{ V}$




Figure 12 Gate threshold voltage

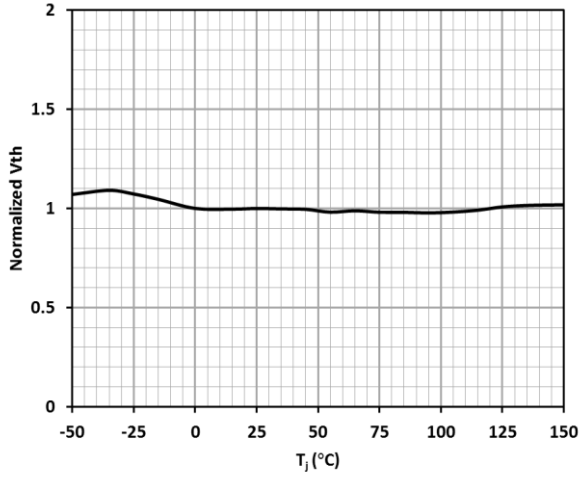


$V_{TH} = f(T_j)$ ;  $V_{GS} = V_{DS}$ ;  $I_D = 17.2 \text{ mA}$

Figure 13 Drain-source on-state resistance

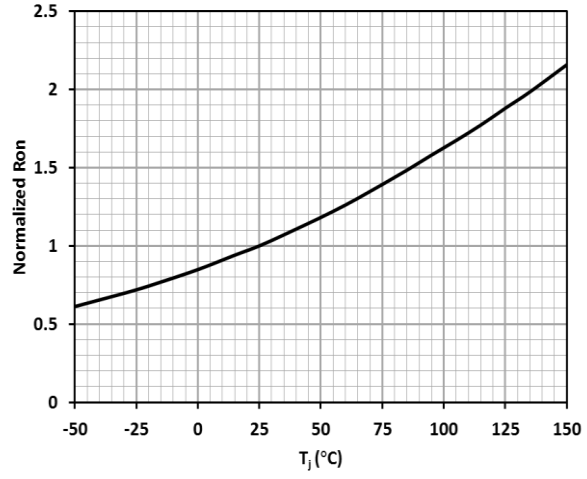


$R_{DS(on)} = f(T_j)$ ;  $I_D = 5 \text{ A}$ ;  $V_{GS} = 6 \text{ V}$

Figure 14 Power dissipation

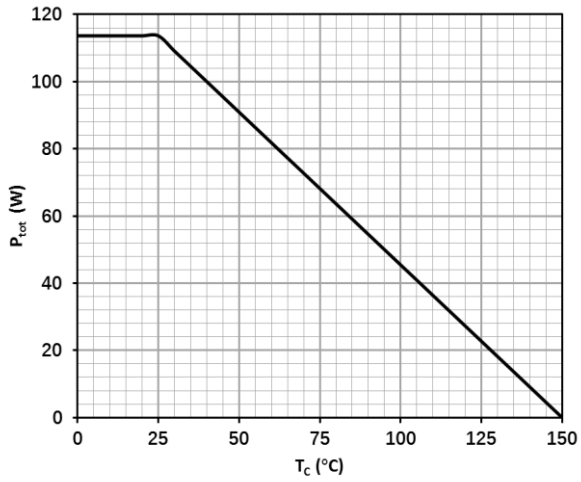


$P_{tot} = f(T_c)$

Figure 15 Max.transient thermal impedance

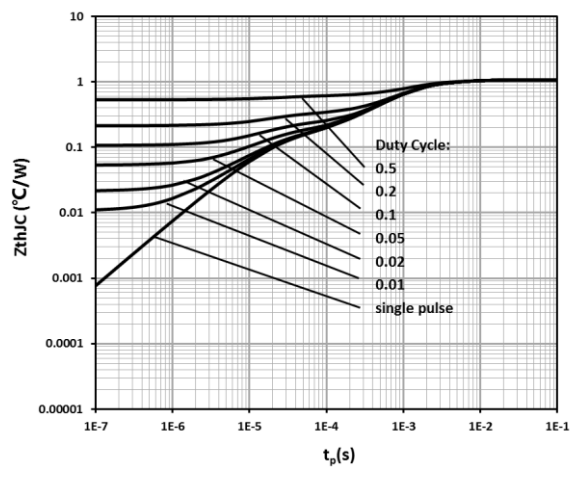


$Z_{thJC} = f(t_p, D)$

Figure 16 Safe operating area

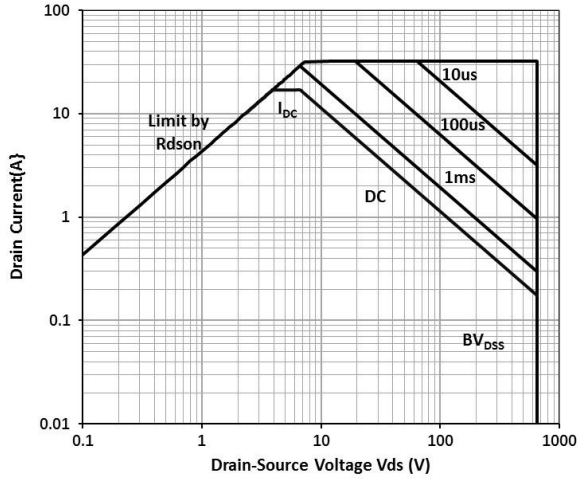


$I_D = f(V_{DS}); T_C = 25\text{ °C}$

Figure 17 Safe operating area

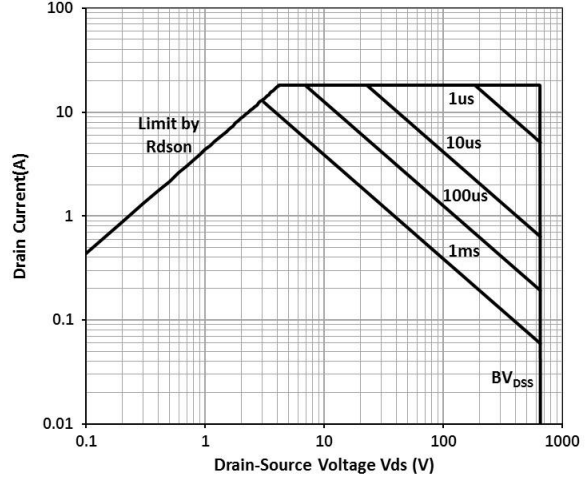


$I_D = f(V_{DS}); T_C = 125\text{ °C}$

Figure 18 Typ. gate charge

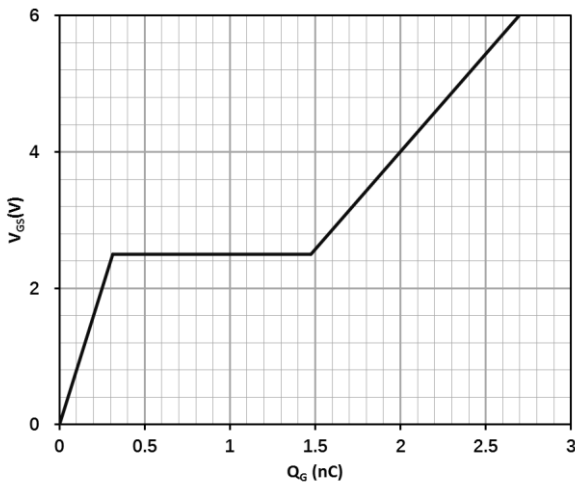


$V_{GS} = f(Q_G); V_{DCLINK} = 400\text{ V}; I_D = 5\text{ A}$

Figure 19 Typ. capacitances

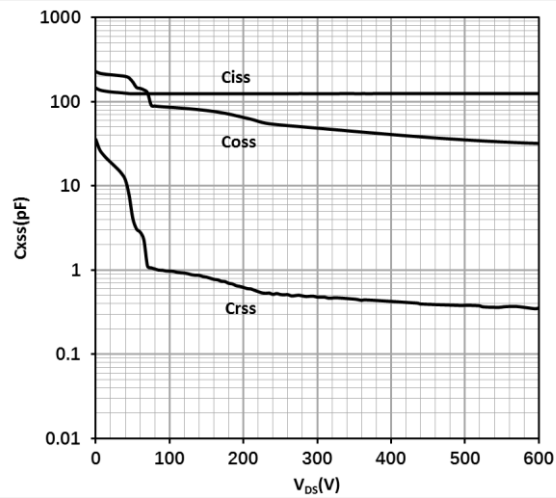


$C_{XSS} = f(V_{DS}); \text{Freq.} = 100\text{ kHz}$

Figure 20 Typ. output charge

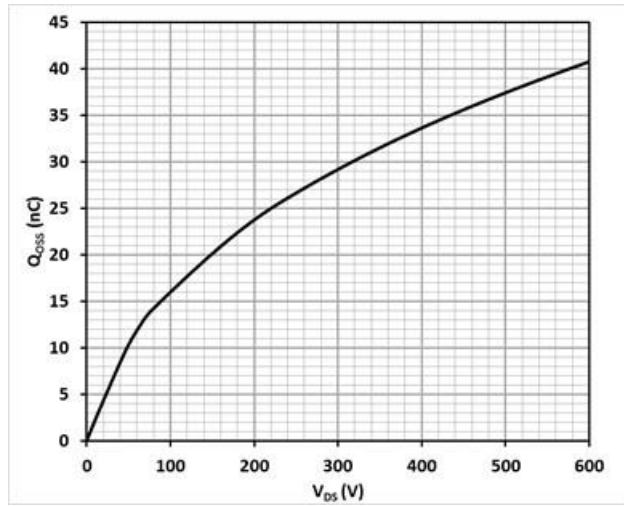


$Q_{oss} = f(V_{DS}); \text{Freq.} = 100 \text{ kHz}$

Figure 21 Typ. Coss stored Energy

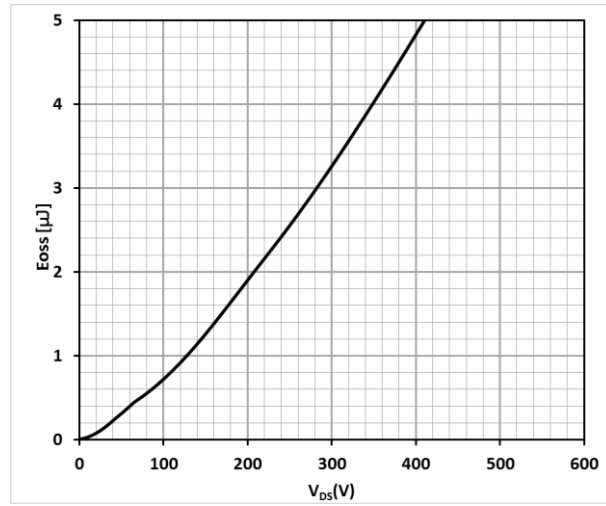


$E_{oss} = f(V_{DS}); \text{Freq.} = 100 \text{ kHz}$

Figure 22 Typ. Switching times with inductive load

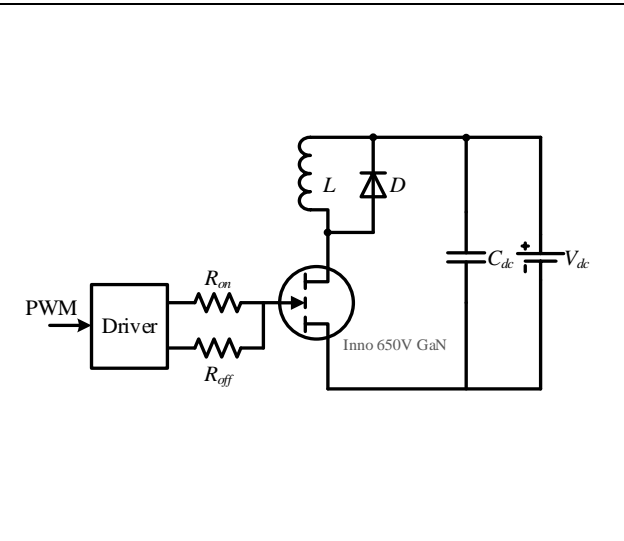


$V_{DS} = 400 \text{ V}, I_D = 10 \text{ A}, L = 318 \mu\text{H}, V_{GS} = 6 \text{ V},$   
 $R_{on} = 10 \Omega, R_{off} = 2 \Omega$

Figure 23 Typ. Switching times waveform

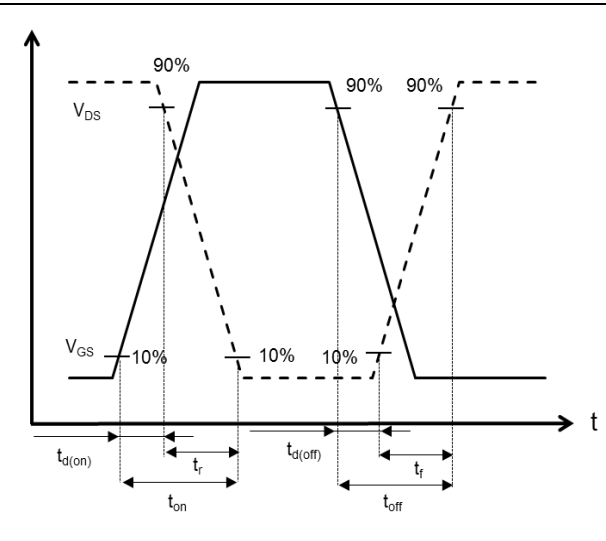

## 9. Chip drawing

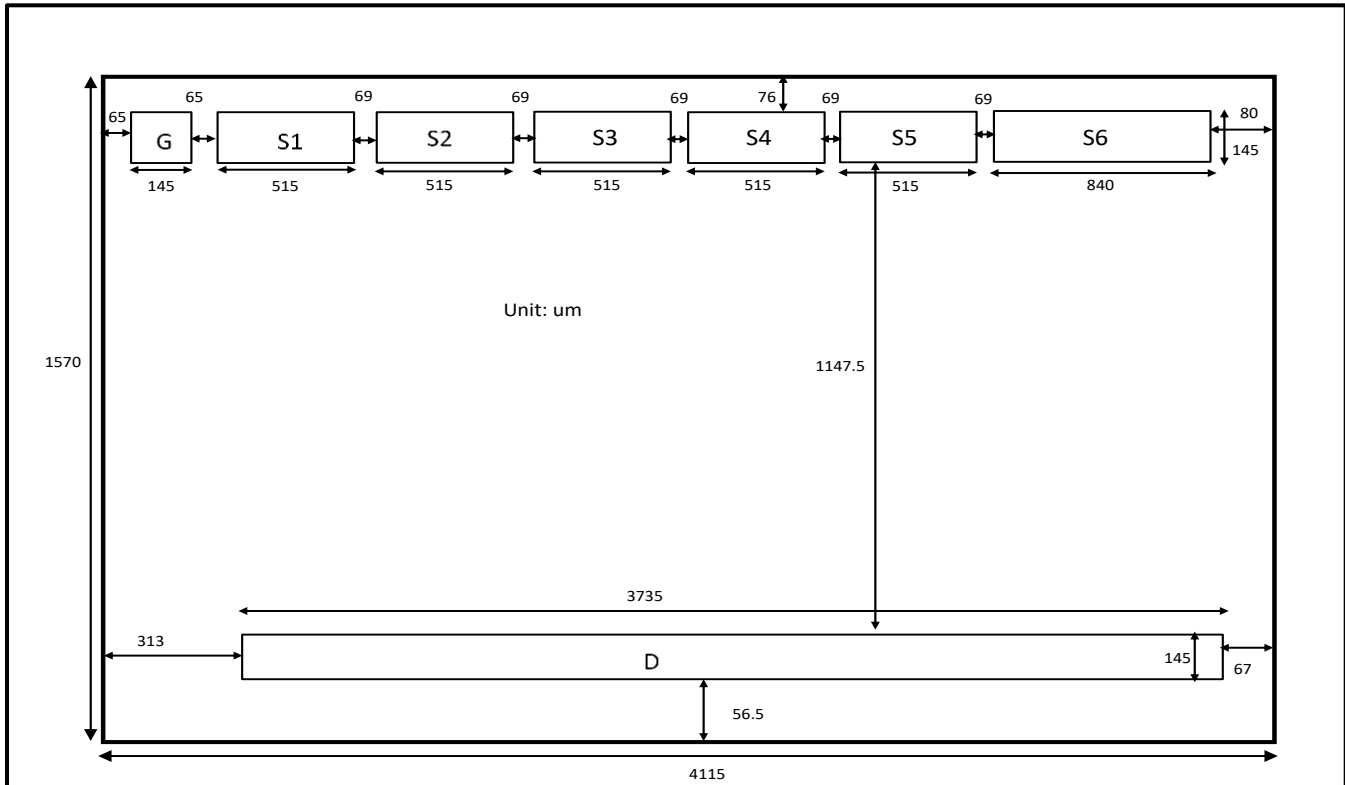

### Wafer features

Physical Characteristics		Unit
Wafer Size	8	inches
Wafer Thickness	1150	$\mu\text{m}$
Die Size (with S/L)	4.195 x 1.65	$\text{mm}^2$
Scribe Street Width	80	$\mu\text{m}$
Metal thickness	3.5	$\mu\text{m}$
Top Metallization	Al-Cu	
Gate Pad Size	145x145	$\mu\text{m}^2$
Source Pad Size	S1:515 x 145 S2:515 x 145 S3:515 x 145 S4:515 x 145 S5:515 x 145 S6:840 x 145	$\mu\text{m}^2$
Drain Pad Size	3735 x 145	$\mu\text{m}^2$
Backside	Silicon	

**Note:** All the pad size refers to PI top opening size, actual size at PI bottom (top metal exposure) is about 4~8  $\mu\text{m}$  shorter than top opening.

## 10. Revision history

### Major changes since the last revision

Revision	Date	Description of changes
1.0	2021-10-26	1.0 version release
1.2	2022-04-09	1. Optimize parameter descriptions. 2. Delete $E_{on}/E_{off}/E_{oss}$ from Electric characteristics.

---

## Important Notice

The information provided in this document is intended as a guide only and shall not in any event be regarded as a guarantee of conditions, characteristics or performance. Innoscience does not assume any liability arising out of the application or use of any product described herein, including but not limited to any personal injury, death, or property or environmental damage. No licenses, patent rights, or any other intellectual property rights is granted or conveyed. Innoscience reserves the right to modify without notice. All rights reserved.