


## Features

- High current gain

1. BASE
2. Emitter
3. Collector

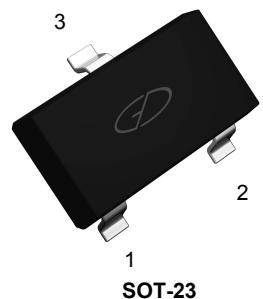

## Absolute Maximum Ratings

(T<sub>A</sub>=25°C unless otherwise noted)







Parameter	Symbol	Value	Unit
Collector-Base Voltage	V <sub>CBO</sub>	80	V
Collector-Emitter Voltage	V <sub>CEO</sub>	80	V
Emitter-Base Voltage	V <sub>EBO</sub>	12	V
Collector Current	I <sub>C</sub>	500	mA
Collector Power Dissipation	P <sub>C</sub>	200	mW
Thermal Resistance From Junction To Ambient	R <sub>θJA</sub>	625	°C/W
Junction Temperature	T <sub>J</sub>	-55 to +150	°C
Storage Temperature	T <sub>STG</sub>	-55 to +150	°C

## Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)


Parameter	Symbol	Test Conditions	Min	Max	Unit
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> =100μA, I <sub>E</sub> =0	80	-	V
Collector-Emitter sustain Voltage	V <sub>CEO(sus)</sub>	I <sub>C</sub> =100μA, V <sub>BE</sub> =0	80	-	V
Emitter-base Breakdown Voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> =10μA, I <sub>C</sub> =0	12	-	V
Collector Cut-off Current	I <sub>CBO</sub>	V <sub>CB</sub> =60V, I <sub>E</sub> =0	-	0.1	μA
Collector Cut-off Current	I <sub>CES</sub>	V <sub>CE</sub> =60V, V <sub>BE</sub> =0	-	0.5	μA
Emitter Cut-off Current	I <sub>EBO</sub>	V <sub>EB</sub> =10V, I <sub>C</sub> =0	-	0.1	μA
DC Current Gain	h <sub>FE(1)*</sub>	V <sub>CE</sub> =5V, I <sub>C</sub> =10mA	10	-	K
	h <sub>FE(2)*</sub>	V <sub>CE</sub> =5V, I <sub>C</sub> =100mA	10	-	K
Collector-Emitter Saturation Voltage	V <sub>CE(sat)1*</sub>	I <sub>C</sub> =10mA, I <sub>E</sub> =0.01mA	-	1.2	V
	V <sub>CE(sat)2*</sub>	I <sub>C</sub> =100mA, I <sub>E</sub> =0.1mA	-	1.5	V
Base-Emitter Voltage	V <sub>BE*</sub>	V <sub>CE</sub> =5V, I <sub>C</sub> =100mA	-	2	V
Collector Output Capacitance	C <sub>ob</sub>	-	-	8	pF
Transition Frequency	f <sub>T</sub>	V <sub>CE</sub> =5V, I <sub>C</sub> =10mA, f=100MHz	125	-	MHz

\*Pulse test: pulse width ≤300μs, duty cycle≤ 2.0%.

## Typical Electrical Characteristic Curves

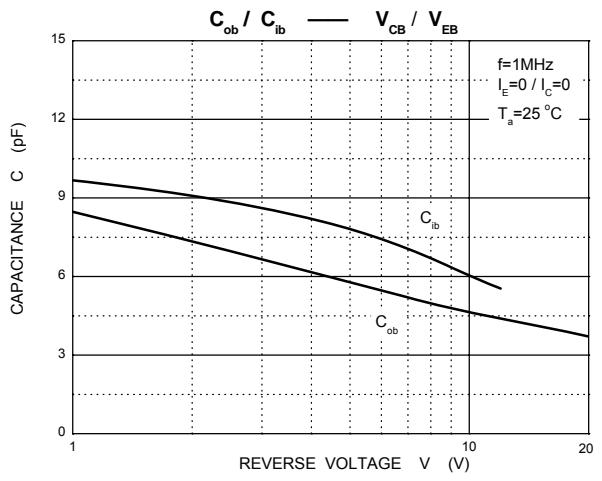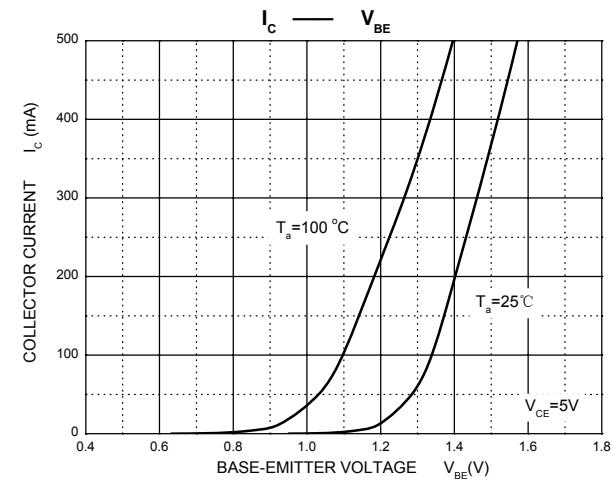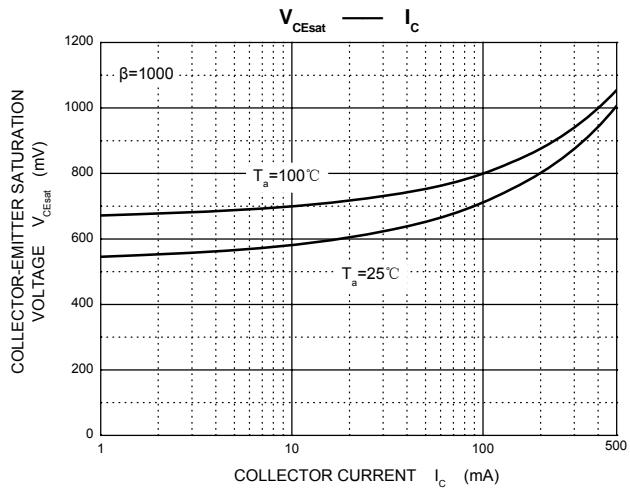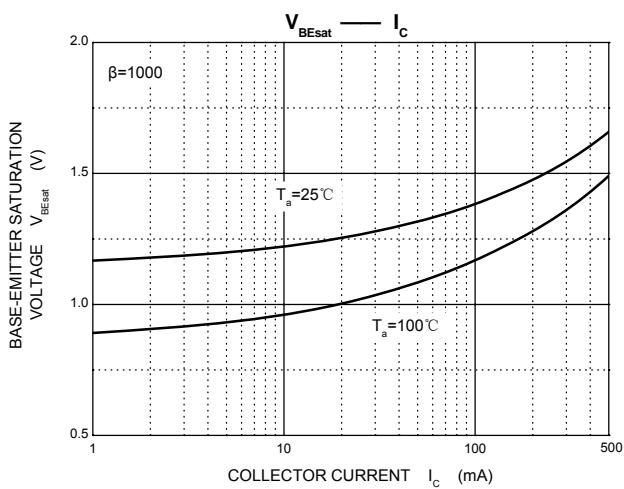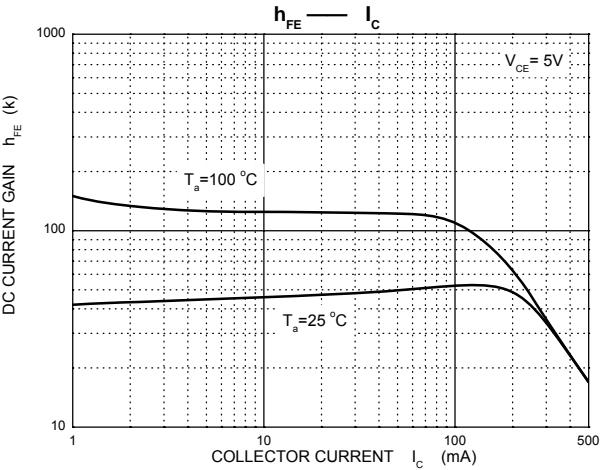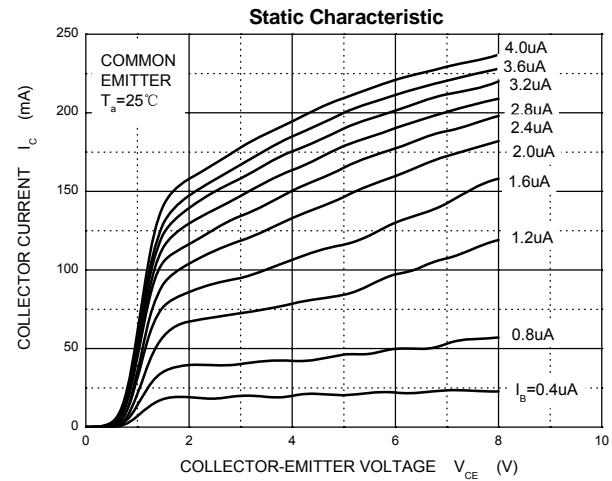


## Typical Electrical Characteristic Curves

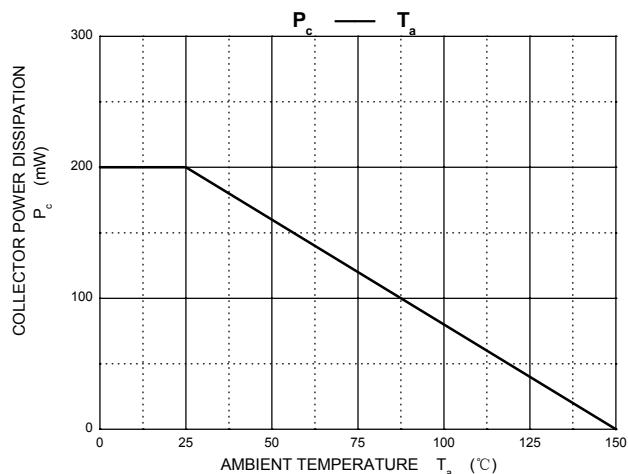


## Package Outline Dimensions

SOT-23

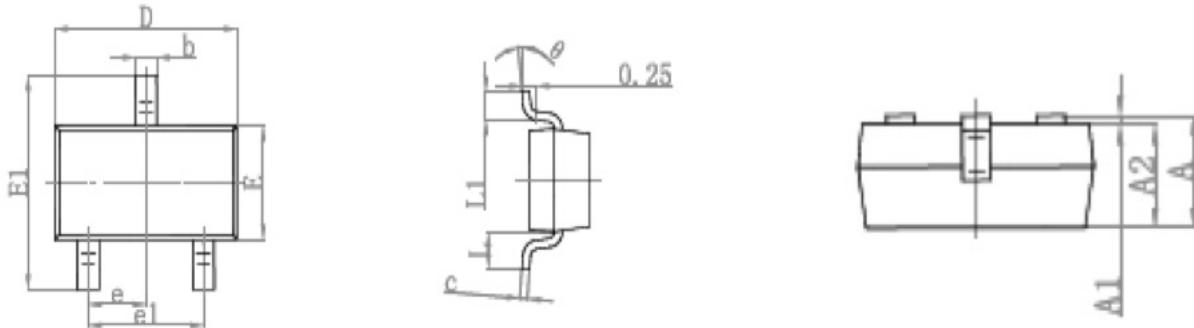

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

## Suggested Pad Layout

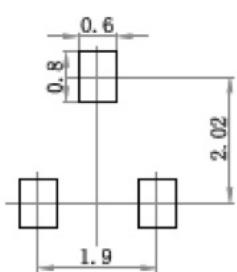

Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.