

# QBF-40-100-30

0.04~0.1GHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	0.04~0.1GHz
Passband Insertion Loss:	1.5dB max.
Passband Ripple:	0.8dB max.
VSWR:	1.5 max.
Stopband Attenuation:	30dB@DC~30MHz min. 30dB@118~400MHz min.
Impedance:	50Ω
Average Power:	1W max.

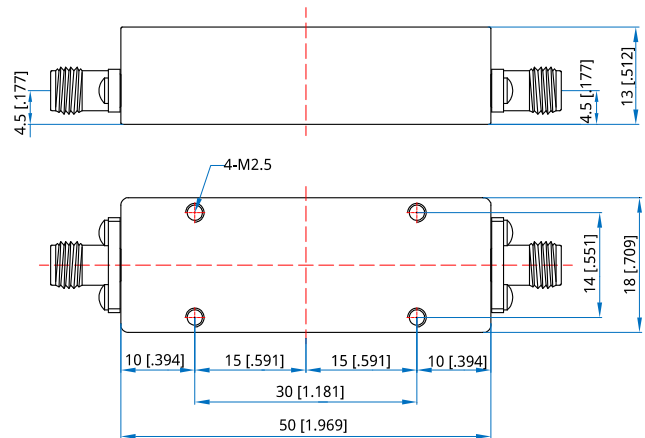
**Mechanical**

Size*1:	50*18*13mm 1.969*0.709*0.512in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-40-100-30**

Customization is available upon request.