

Silicon Carbide Power MOSFET E-Series Automotive N-Channel Enhancement Mode

# AND THE CONSTITUTION OF THE CASE OF THE CA

#### **Features**

- · 3rd generation SiC MOSFET technology
- · High blocking voltage with low on-resistance
- High-speed switching with low capacitances
- Fast intrinsic diode with low reverse recovery (Q,,)
- Halogen free, RoHS compliant
- Automotive Qualified (AEC-Q101) and PPAP Capable

#### **Benefits**

- Higher system efficiency
- · Reduce cooling requirements
- Increase power density
- · Increase system switching frequency

### **Applications**


- EV Battery Chargers
- High Voltage DC/DC Converters

#### **Package**









Part Number	Package	Marking
E3M0160120D	TO-247-3L	E3M0160120D

## **Maximum Ratings** ( $T_c = 25 \, ^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit	Note	
V <sub>DSmax</sub>	Drain - Source Voltage		1200	V	
$V_{GSmax}$	Gate - Source Voltage		-8/+19	٧	Note: 1
	Continuous Drain Current, $V_{GS}$ = 15 V $ T_C = 25^{\circ}C $ $T_C = 100^{\circ}C $		17.9		Fig. 19
I <sub>D</sub>			13.5		Note: 2
I <sub>D(pulse)</sub>	Pulsed Drain Current, Pulse width t <sub>P</sub> limited by T <sub>jmax</sub>	34	А	Fig. 22	
P <sub>D</sub>	Power Dissipation, T <sub>c</sub> =25°C, T <sub>J</sub> = 175 °C	103	W	Fig. 20 Note: 2	
$T_J$ , $T_{stg}$	Operating Junction and Storage Temperature	-55 to +175	°C		
T <sub>L</sub>	Solder Temperature, 1.6mm (0.063") from case for 10s			°C	
M <sub>d</sub>	Mounting Torque , M3 or 6-32 screw	1 8.8	Nm lbf-in		

Note (1): Recommended turn off / turn on gate voltage  $V_{_{GS}}$  - 4V...0V / +15V

Note (2): Verified by design

# **Electrical Characteristics** ( $T_c = 25^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Min.	Тур.	Max.	Unit	Test Conditions	Note
V <sub>(BR)DSS</sub>	Drain-Source Breakdown Voltage	1200			V	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 100 μA	
V	Cata Thurshald Valta us	1.8	2.8	3.6	V	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 2.33 mA	Fig. 11
$V_{GS(th)}$	Gate Threshold Voltage		2.2		V	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 2.33 mA, T <sub>J</sub> = 175°C	
I <sub>DSS</sub>	Zero Gate Voltage Drain Current		1	50	μA	V <sub>DS</sub> = 1200 V, V <sub>GS</sub> = 0 V	
I <sub>GSS</sub>	Gate-Source Leakage Current		10	250	nA	V <sub>GS</sub> = 15 V, V <sub>DS</sub> = 0 V	
R <sub>DS(on)</sub>	Drain-Source On-State Resistance		159	208	mΩ	V <sub>GS</sub> = 15 V, I <sub>D</sub> = 8.5 A	Fig. 4,
US(on)	Brain course on state resistance		280		11152	$V_{GS} = 15 \text{ V, } I_D = 8.5 \text{ A, } T_J = 175^{\circ}\text{C}$	5, 6
g <sub>fs</sub>	Transconductance		5		S	V <sub>DS</sub> = 20 V, I <sub>DS</sub> = 8.5 A	Fig. 7
915	Transconducturios		5		L ŭ	V <sub>DS</sub> = 20 V, I <sub>DS</sub> = 8.5 A, T <sub>J</sub> = 175°C	1 1g. /
C <sub>iss</sub>	Input Capacitance		730			$V_{GS} = 0 \text{ V}, V_{DS} = 0 \text{ V to } 1000 \text{ V}$	
Coss	Output Capacitance		31		pF	F = 1 Mhz	Fig. 17, 18
C <sub>rss</sub>	Reverse Transfer Capacitance		2		1	V <sub>AC</sub> = 25 mV	
E <sub>oss</sub>	Coss Stored Energy		17		μJ	V <sub>DS</sub> = 1000 V, F = 1 Mhz	Fig. 16
C <sub>o(er)</sub>	Effective Output Capacitance (Energy Related)		36		pF		
C <sub>o(tr)</sub>	Effective Output Capacitance (Time Related)		55		pF	$V_{GS} = 0 \text{ V, } V_{DS} = 0 \text{V to } 800 \text{V}$	Note: 3
Eon	Turn-On Switching Energy (External Diode)		195			$V_{DS} = 800 \text{ V}, V_{GS} = -4 \text{ V}/15 \text{ V}, I_{D} = 8.5 \text{ A},$	
E <sub>OFF</sub>	Turn Off Switching Energy (External Diode)		11		μJ	$R_{G(ext)} = 2.5 \Omega$ , L= 404 $\mu$ H, T <sub>J</sub> =175°C FWD = External SiC DIODE	Fig. 26
E <sub>on</sub>	Turn-On Switching Energy (Body Diode FWD)		337			$V_{DS} = 800 \text{ V}, V_{GS} = -4 \text{ V}/15 \text{ V}, I_D = 8.5 \text{ A},$ $R_{G(ext)} = 2.5 \Omega, L = 404 \mu\text{H}, T_J = 175^{\circ}\text{C}$	Fi 06
E <sub>OFF</sub>	Turn-Off Switching Energy (Body Diode FWD)		11		μJ	FWD = Internal Body Diode	Fig. 26
t <sub>d(on)</sub>	Turn-On Delay Time		25				
t <sub>r</sub>	Rise Time		15		]	$V_{DD}$ = 800 V, $V_{GS}$ = -4 V/15 V $I_{D}$ = 8.5 A, $R_{G(ext)}$ = 2.5 $\Omega$ ,	Fig. 27
t <sub>d(off)</sub>	Turn-Off Delay Time		14		ns	Timing relative to V <sub>DS</sub>	
t <sub>f</sub>	Fall Time		12				
R <sub>G(int)</sub>	Internal Gate Resistance		6.5		Ω	f = 1 MHz, V <sub>AC</sub> = 25 mV	
$Q_{gs}$	Gate to Source Charge		10			V <sub>DS</sub> = 800 V, V <sub>GS</sub> = -4 V/15 V	
$Q_{gd}$	Gate to Drain Charge		13	]	nC	I <sub>D</sub> = 8.5 A	Fig. 12
Qg	Total Gate Charge		33			Per IEC60747-8-4 pg 21	


Note (3):  $C_{o(er)}$ , a lumped capacitance that gives same stored energy as Coss while Vds is rising from 0 to 800V  $C_{o(tr)}$ , a lumped capacitance that gives same charging time as Coss while Vds is rising from 0 to 800V

# **Reverse Diode Characteristics** ( $T_c = 25^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Тур.	Max.	Unit	Test Conditions	Note
V	Die de Ferrand Velhauer	4.8		٧	$V_{GS} = -4 \text{ V, I}_{SD} = 4.25 \text{ A, T}_{J} = 25 ^{\circ}\text{C}$	Fig. 8,
$V_{SD}$	Diode Forward Voltage	4.2		٧	$V_{GS} = -4 \text{ V, I}_{SD} = 4.25 \text{ A, T}_{J} = 175 ^{\circ}\text{C}$	Fig. 8, 9, 10
Is	Continuous Diode Forward Current		17	Α	V <sub>GS</sub> = -4 V, T <sub>C</sub> = 25°C	
I <sub>S, pulse</sub>	Diode pulse Current		34	Α	$V_{GS}$ = -4 V, pulse width $t_P$ limited by $T_{jmax}$	
t <sub>rr</sub>	Reverse Recover time	36		ns		
Q <sub>rr</sub>	Reverse Recovery Charge	199		nC	$V_{GS} = -4 \text{ V, I}_{SD} = 8.5 \text{ A, V}_{R} = 800 \text{ V}$ $dif/dt = 1140 \text{ A/}\mu\text{s, T}_{J} = 175 \text{ °C}$	
I <sub>rrm</sub>	Peak Reverse Recovery Current	10		Α		
t <sub>rr</sub>	Reverse Recover time	38		ns		
Q <sub>rr</sub>	Reverse Recovery Charge	174		nC	V <sub>GS</sub> = -4 V, I <sub>SD</sub> = 8.5 A, V <sub>R</sub> = 800 V dif/dt = 580 A/μs, Τ <sub>ι</sub> = 175 °C	
I <sub>rrm</sub>	Peak Reverse Recovery Current	7		Α	]	

#### **Thermal Characteristics**

Symbol	Parameter	Тур.	Max.	Unit	Test Conditions	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	1.13	1.24	°C/W		Fig. 21

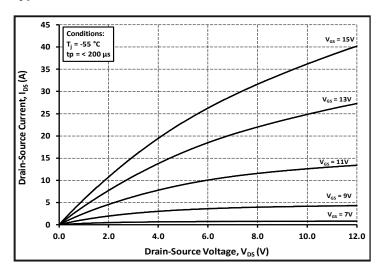

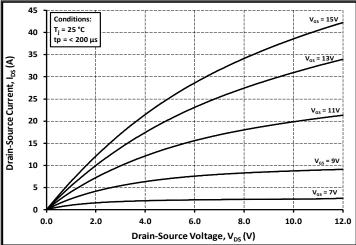

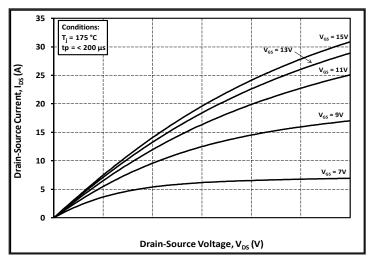


Figure 1. Output Characteristics  $T_J$  = -55 °C





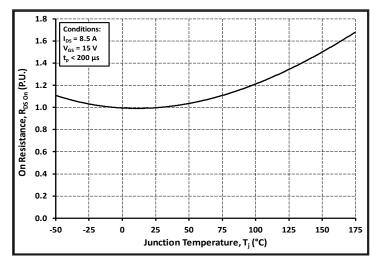
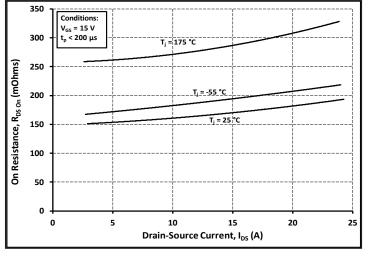


Figure 3. Output Characteristics T<sub>J</sub> = 175 °C

Figure 4. Normalized On-Resistance vs. Temperature



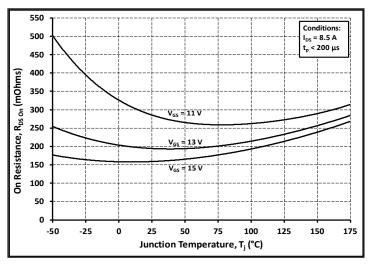
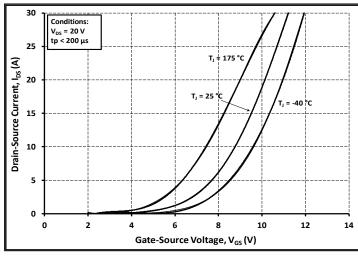


Figure 5. On-Resistance vs. Drain Current For Various Temperatures

Figure 6. On-Resistance vs. Temperature For Various Gate Voltage



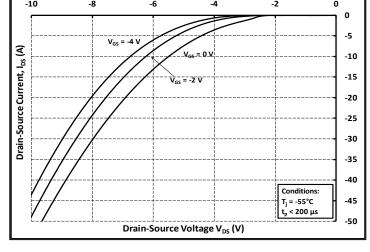
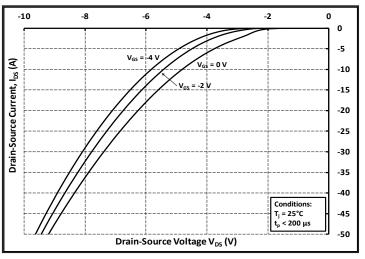


Figure 7. Transfer Characteristic for Various Junction Temperatures

Figure 8. Body Diode Characteristic at -55 °C



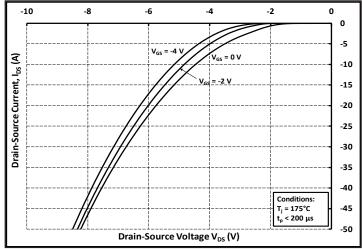
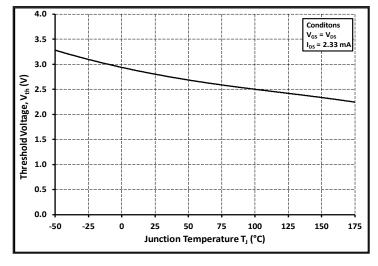


Figure 9. Body Diode Characteristic at 25 °C

Figure 10. Body Diode Characteristic at 175 °C



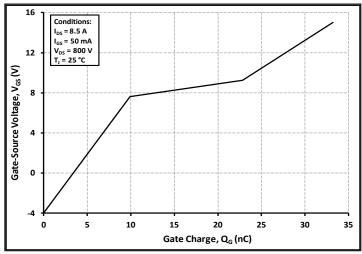


Figure 11. Threshold Voltage vs. Temperature

Figure 12. Gate Charge Characteristics

#### **Typical Performance**


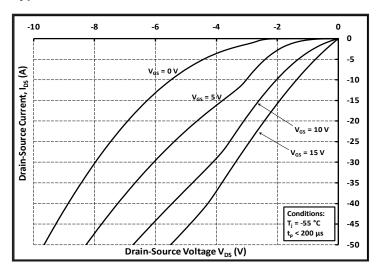


Figure 13. 3rd Quadrant Characteristic at -55 °C

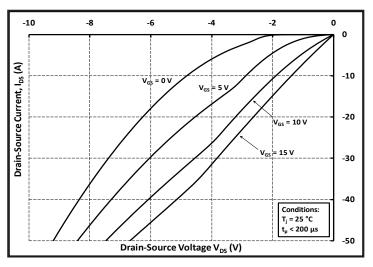

6

Figure 14. 3rd Quadrant Characteristic at 25 °C

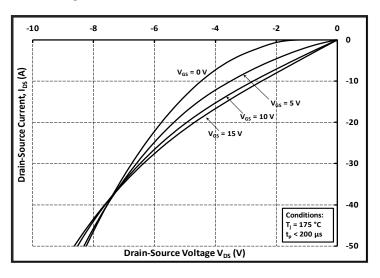


Figure 15. 3rd Quadrant Characteristic at 175 °C

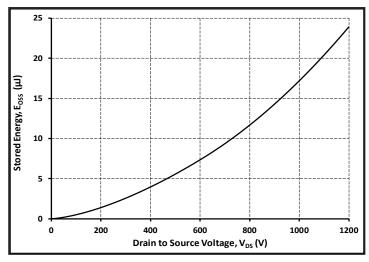


Figure 16. Output Capacitor Stored Energy

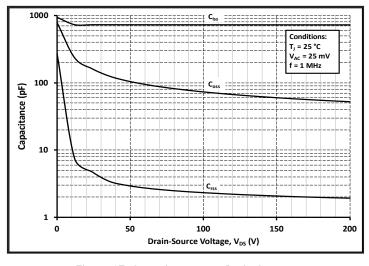


Figure 17. Capacitances vs. Drain-Source Voltage (0 - 200V)

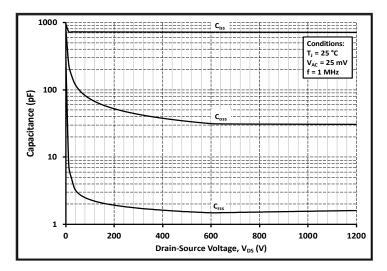
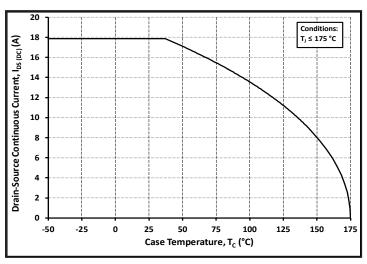


Figure 18. Capacitances vs. Drain-Source Voltage (0 - 1200V)



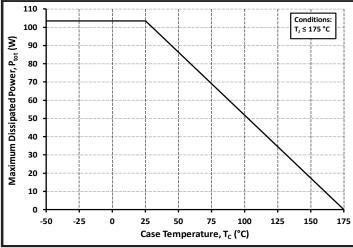
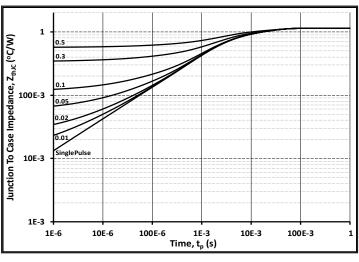


Figure 19. Continuous Drain Current Derating vs.

Case Temperature

Figure 20. Maximum Power Dissipation Derating vs.

Case Temperature



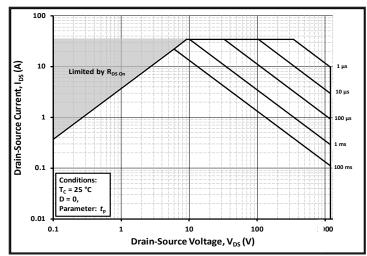
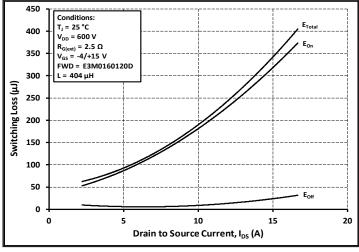


Figure 21. Transient Thermal Impedance (Junction - Case)

Figure 22. Safe Operating Area



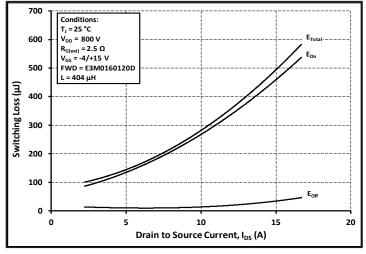


Figure 23. Clamped Inductive Switching Energy vs. Drain Current ( $V_{DD}$  = 600V)

Figure 24. Clamped Inductive Switching Energy vs. Drain Current ( $V_{DD}$  = 800V)

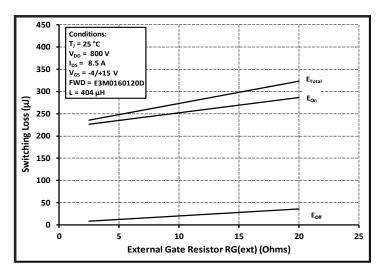


Figure 25. Clamped Inductive Switching Energy vs.  $R_{G(ext)}$ 

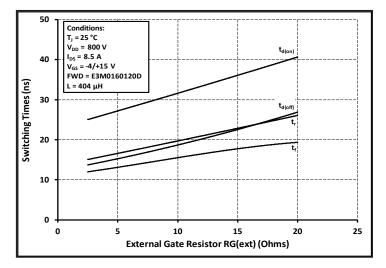


Figure 27. Switching Times vs.  $R_{G(ext)}$ 

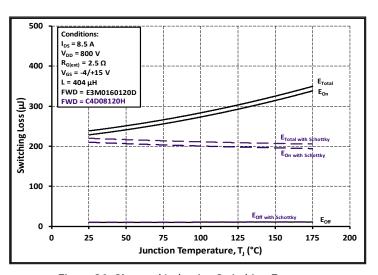


Figure 26. Clamped Inductive Switching Energy vs.
Temperature

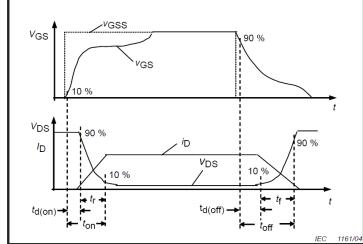


Figure 28. Switching Times Definition

9

#### **Test Circuit Schematic**



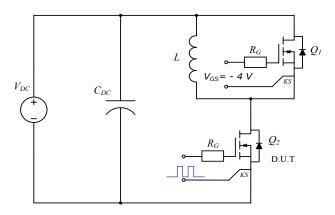


Figure 29. Clamped Inductive Switching Waveform Test Circuit

#### **Package Dimensions**

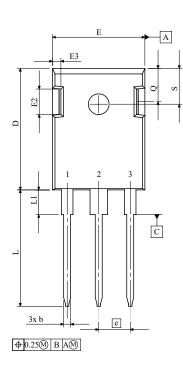

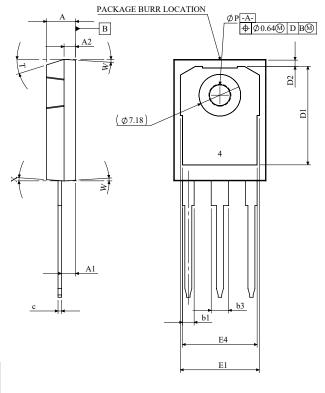


SYMBOL	MIN (mm)	MAX (mm)			
A	4.83	5.21			
Al	2.29	2.54			
A2	1.91	2.16			
h h	1.07	1.33			
b1	1.07	2.41			
b3	-				
	2.87	3.38			
c	0.55	0.68			
D	20.8	21.1			
D1	16.25	17.65			
D2	0.95	1.25			
E	15.75	16.13			
E1	13.1	14.15			
E2	3.68	5.1			
E3	1	1.9			
E4	12.38	13.43			
e	5.44 BSC				
L	19.81	20.32			
L1	4.1	4.4			
ØΡ	3.51	3.65			
Q	5.49	6			
S	6.04	6.3			
T	17.5° REF.				
W	3.5° REF.				
X	4° REF.				

1	GATE	
2	DRAIN	
3	SOURCE	
4	DRAIN	

#### NOTES

- 1. ALL METAL SURFACES ARE TIN PLATED (MATTE), EXCEPT AREA OF CUT.
- 2. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
- DIMENSIONING & TOLERANCING CONFORM TO ASME 114,3M-195
   ALL DIMENSIONS ARE LISTED IN MILLIMETERS. ANGLES ARE IN DEGREES.
- 4. BURR OR MOLD FLASH SIZE (0.5 mm) IS NOT INCLUDED IN THE DIMENSIONS

## **Recommended Solder Pad Layout**



TO-247-3

## Revision history

Document Version	Date of release	Descriptiion of changes
1.0	July-2023	Initial datasheet
2.0	October-2023	Corrected Rdson max value on page 2

#### Notes & Disclaimer

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfspeed. No communication from any employee or agent of Wolfspeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

Notwithstanding any application-specific information, guidance, assistance, or support that Wolfspeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer's purposes, including without limitation for use in the applications identified in the next bullet point, and for the compliance of the buyers' products, including those that incorporate this product, with all applicable legal, regulatory, and safety-related requirements.

This product has not been designed or tested for use in, and is not intended for use in, applications in which failure of the product would reasonably be expected to cause death, personal injury, or property damage, including but not limited to equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment, aircraft navigation, communication, and control systems, aircraft power and propulsion systems, air traffic control systems, and equipment used in the planning, construction, maintenance, or operation of nuclear facilities.

#### **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Documentation sections of www.wolfspeed. com.

#### **REACh Compliance**

REACh substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfspeed representative to ensure you get the most up-to-date REACh SVHC Declaration. REACh banned substance information (REACh Article 67) is also available upon request.

#### **Contact info:**

4600 Silicon Drive Durham, NC 27703 USA Tel: +1.919.313.5300 www.wolfspeed.com/power

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. PATENT: https://www.wolfspeed.com/legal/patents

The information in this document is subject to change without notice.